

**Silicon PNP Power Transistors**

**2SA1645**

**DESCRIPTION**


- With TO-220 package
- Fast switching speed
- Low collector saturation voltage

**APPLICATIONS**

- For use in switching power supplies,DC-DC converters,motor drivers,solenoid drivers, and other low-voltage power supply devices, as well as for high current switching

**PINNING**

PIN	DESCRIPTION
1	Emitter
2	Collector;connected to mounting base
3	Base

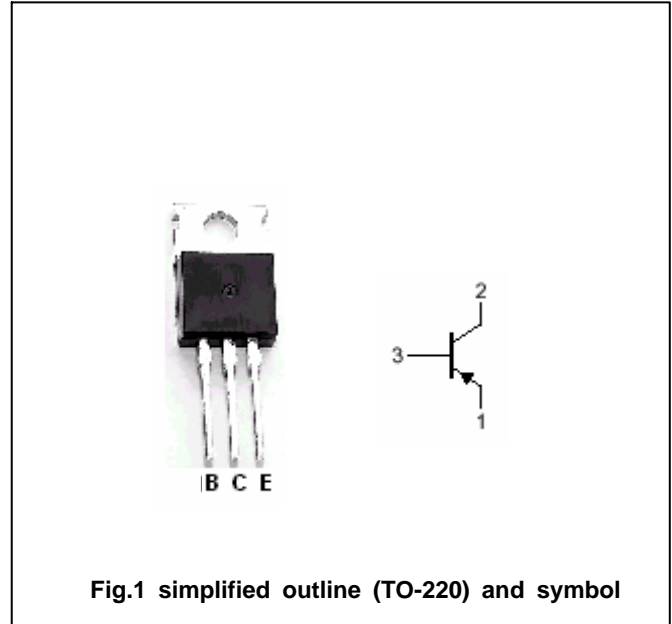

**Absolute maximum ratings(Ta=25 )**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>CBO</sub>	Collector-base voltage	Open emitter	-150	V
V <sub>CEO</sub>	Collector-emitter voltage	Open base	-100	V
V <sub>EBO</sub>	Emitter-base voltage	Open collector	-7	V
I <sub>C</sub>	Collector current		-7	A
I <sub>CM</sub>	Collector current-peak	PW 300 μs, duty cycle 10%	-14	A
I <sub>B</sub>	Base current		-3.5	A
P <sub>T</sub>	Total power dissipation	T <sub>a</sub> =25	1.5	W
		T <sub>C</sub> =25	35	
T <sub>j</sub>	Junction temperature		150	
T <sub>stg</sub>	Storage temperature		-55~150	

## Silicon PNP Power Transistors

## 2SA1645

## CHARACTERISTICS

T<sub>j</sub>=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>CEsat-1</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =-4A; I <sub>B</sub> =-0.2A			-0.3	V
V <sub>CEsat-2</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =-6A; I <sub>B</sub> =-0.3A			-0.5	V
V <sub>BE sat-1</sub>	Base-emitter saturation voltage	I <sub>C</sub> =-4A; I <sub>B</sub> =-0.2A			-1.2	V
V <sub>BE sat-2</sub>	Base-emitter saturation voltage	I <sub>C</sub> =-6A; I <sub>B</sub> =-0.3A			-1.5	V
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =-100V; I <sub>E</sub> =0			-10	μA
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =-5V; I <sub>C</sub> =0			-10	μA
h <sub>FE-1</sub>	DC current gain	I <sub>C</sub> =-0.5A; V <sub>CE</sub> =-2V	100			
h <sub>FE-2</sub>	DC current gain	I <sub>C</sub> =-1.5A; V <sub>CE</sub> =-2V	100		400	
h <sub>FE-3</sub>	DC current gain	I <sub>C</sub> =-4A; V <sub>CE</sub> =-2V	60			
f <sub>T</sub>	Transition frequency	I <sub>C</sub> =-1.5A; V <sub>CE</sub> =-10V		150		MHz
C <sub>OB</sub>	Collector capacitance	I <sub>E</sub> =-0; V <sub>CB</sub> =-10V; f=1MHz		150		pF

## Switching times

t <sub>on</sub>	Turn-on time	I <sub>C</sub> =-4A; I <sub>B1</sub> =-I <sub>B2</sub> =-0.2A R <sub>L</sub> =12.5 ; V <sub>CC</sub> =-50V		0.3		μs
t <sub>s</sub>	Storage time			1.5		μs
t <sub>f</sub>	Fall time			0.4		μs

◆ h<sub>FE-2</sub> Classifications

M	L	K
100-200	150-300	200-400

