

Silicon PNP Power Transistors 2N5621 2N5623 2N5625 2N5627

DESCRIPTION

- With TO-3 package
- Excellent safe operating area
- Low collector-emitter saturation voltage

APPLICATIONS

- For audio and general-purpose applications

PINNING(see Fig.2)

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

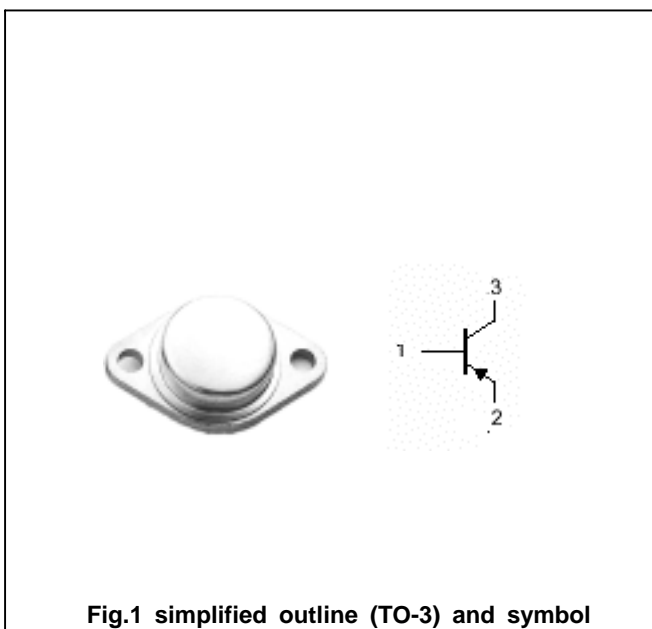


Fig.1 simplified outline (TO-3) and symbol

Absolute maximum ratings(Ta=)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	2N5621	60	V
		2N5623/5625	80	
		2N5627	100	
V _{CEO}	Collector-emitter voltage	2N5621	80	V
		2N5623/5625	100	
		2N5627	120	
V _{EBO}	Emitter-base voltage	Open collector	5	V
I _C	Collector current		10	A
P _D	Total power dissipation	T _C =25	100	W
T _j	Junction temperature		150	
T _{stg}	Storage temperature		-65~200	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
R _{thj-c}	Thermal resistance junction to case	1.5	/W

Silicon PNP Power Transistors 2N5621 2N5623 2N5625 2N5627

CHARACTERISTICST_j=25 unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEO}	Collector-emitter sustaining voltage	2N5621	I _C =50mA ; I _B =0	60			V
		2N5623/5625		80			
		2N5627		100			
V _{CEsat}	Collector-emitter saturation voltage		I _C =5A; I _B =0.5A			2.0	V
V _{BE}	Base-emitter on voltage		I _C =5A ; V _{CE} =5V			1.5	V
I _{CBO}	Collector cut-off current		V _{CB} =Rated V _{CBO} ; I _E =0			0.1	mA
I _{EBO}	Emitter cut-off current		V _{EB} =5V; I _C =0			0.1	mA
h _{FE}	DC current gain	2N5621/5625	I _C =5A ; V _{CE} =5V	70		200	
		2N5623/5627		30		90	
f _T	Transition frequency	2N5621/5625	I _C =1A ; V _{CE} =12V	40			MHz
		2N5623/5627		30			

Silicon PNP Power Transistors 2N5621 2N5623 2N5625 2N5627

PACKAGE OUTLINE

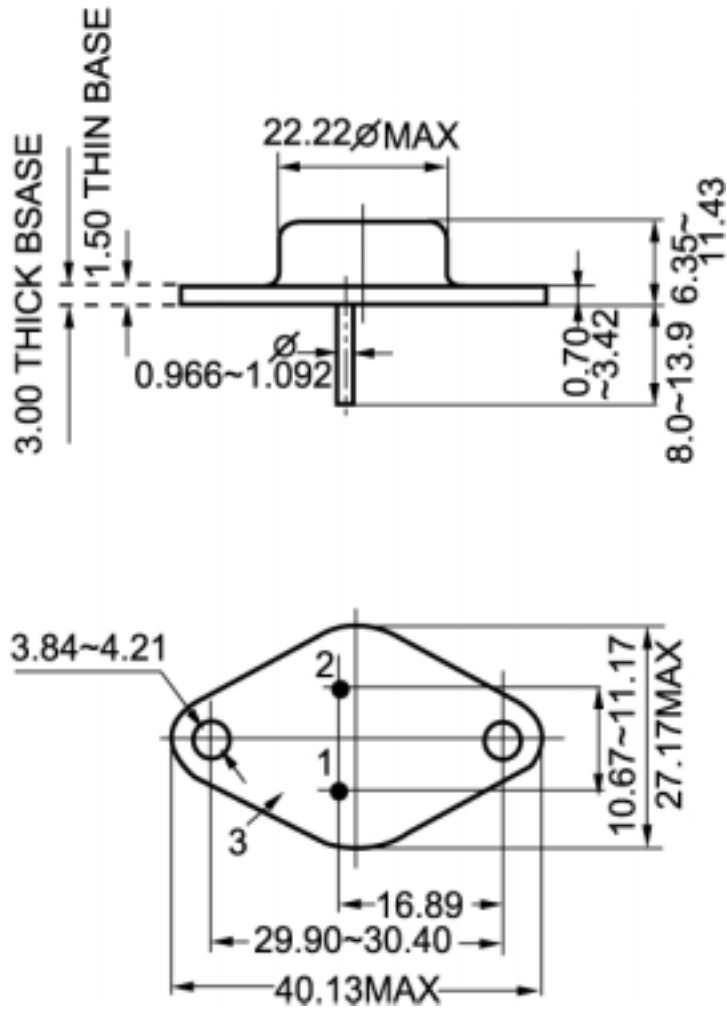


Fig.2 outline dimensions