

Silicon NPN Power Transistor

BU941

DESCRIPTION

- High Voltage
- DARLINGTON

APPLICATIONS



- High ruggedness electronic ignitions
- High voltage ignition coil driver

ABSOLUTE MAXIMUM RATINGS (T_a=25)

SYMBOL	PARAMETER	VALUE	UNIT
V _{CBO}	Collector-Base Voltage	500	V
V _{CEO}	Collector-Emitter Voltage	400	V
V _{EBO}	Emitter-Base Voltage	5	V
I _C	Collector Current- Continuous	15	A
I _{CM}	Collector Current-Peak	30	A
I _B	Base Current	1	A
I _{BM}	Base Current-Peak	5	A
P _C	Collector Power Dissipation @T _C =25	180	W
T _j	Junction Temperature	200	
T _{stg}	Storage Temperature Range	-65~200	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th j-c}	Thermal Resistance, Junction to Case	0.97	/W

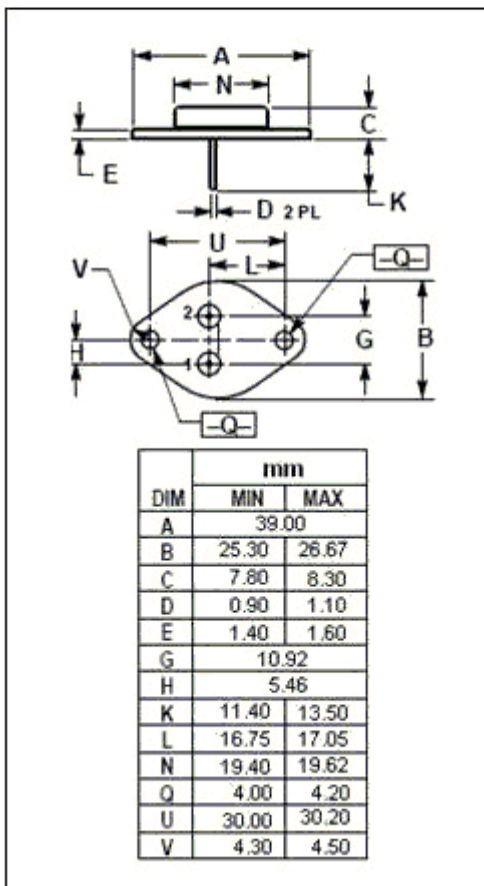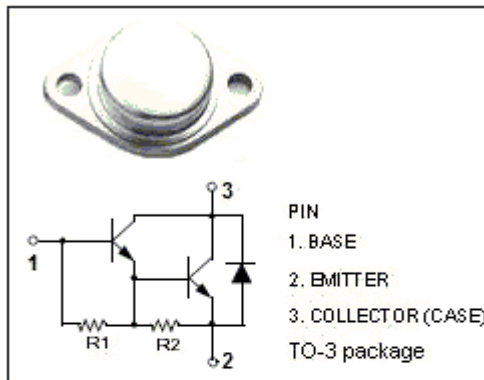

Silicon NPN Power Transistor

BU941

ELECTRICAL CHARACTERISTICS


 $T_C=25$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C= 0.1A; I_B= 0; L= 10mH$	400			V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C= 8 A; I_B= 100mA$			1.6	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C= 10 A; I_B= 250mA$			1.8	V
$V_{CE(sat)-3}$	Collector-Emitter Saturation Voltage	$I_C= 12 A; I_B= 300mA$			2.0	V
$V_{BE(sat)-1}$	Base-Emitter Saturation Voltage	$I_C= 8 A; I_B= 100mA$			2.2	V
$V_{BE(sat)-2}$	Base-Emitter Saturation Voltage	$I_C= 10 A; I_B= 250mA$			2.5	V
$V_{BE(sat)-3}$	Base-Emitter Saturation Voltage	$I_C= 12 A; I_B= 300mA$			2.7	V
I_{CES}	Collector Cutoff Current	$V_{CE}= 500V; V_{BE}= 0$ $V_{CE}= 500V; V_{BE}= 0; T_j= 125$			0.1 0.5	mA
I_{CEO}	Collector Cutoff Current	$V_{CE}= 450V; I_B= 0$ $V_{CE}= 450V; I_B= 0; T_j= 125$			0.1 0.5	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}= 5V; I_C= 0$			20	mA
h_{FE}	DC Current Gain	$I_C= 5A ; V_{CE}= 10V$	300			
V_{ECF}	C-E Diode Forward Voltage	$I_F= 10A$			2.5	V


Silicon NPN Power Transistor

BU941


$h_{FE}-I_C$ Characteristics

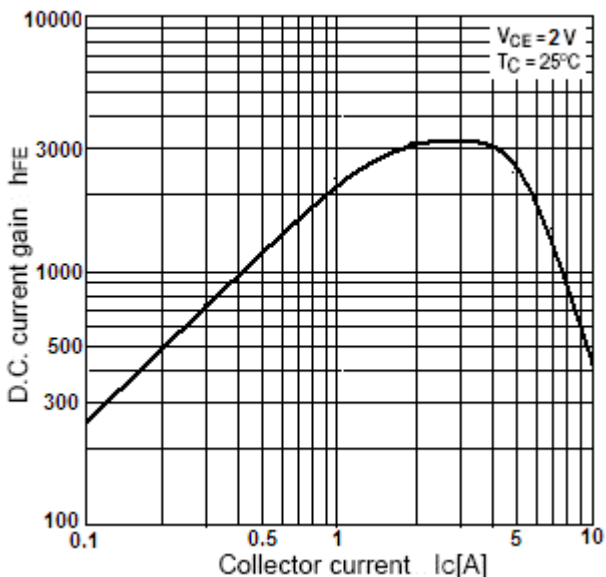

Safe Operating Area

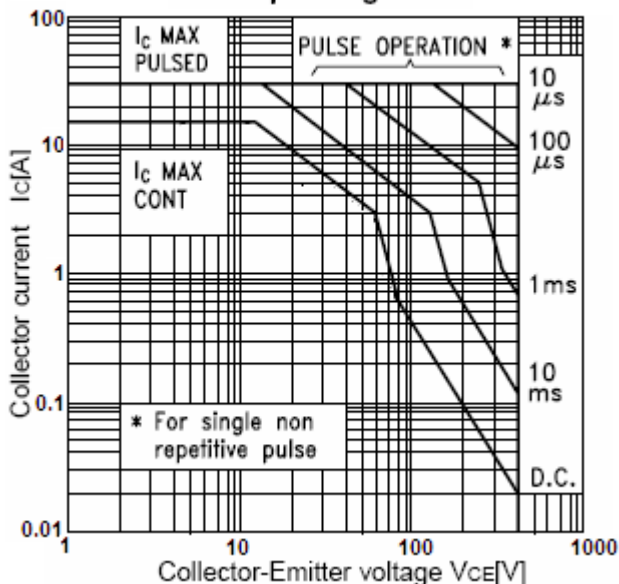

$V_{CE(sat)}-I_C$ Characteristics

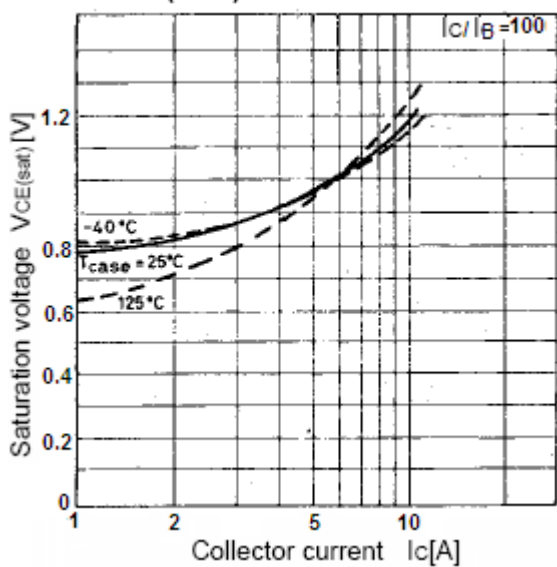

$V_{BE(sat)}-I_C$ Characteristics

