

Silicon NPN Power Transistors

2N5881 2N5882

DESCRIPTION

- With TO-3 package
- Low collector-emitter saturation voltage
- Complement to type 2N5879 2N5880

APPLICATIONS

- For general-purpose power amplifier and switching applications

PINNING

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

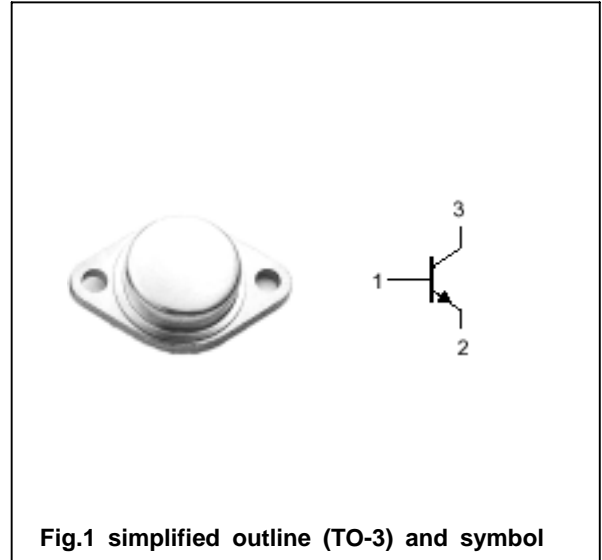


Fig.1 simplified outline (TO-3) and symbol

Absolute maximum ratings($T_a =$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	2N5881	60	V
		2N5882		
V_{CEO}	Collector-emitter voltage	2N5881	60	V
		2N5882		
V_{EBO}	Emitter-base voltage	Open collector	5	V
I_C	Collector current		15	A
I_{CM}	Collector current-peak		30	A
I_B	Base current		5	A
P_D	Total Power Dissipation	$T_C=25$	160	W
T_j	Junction temperature		150	
T_{stg}	Storage temperature		-65~200	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
$R_{th\ j-c}$	Thermal resistance junction to case	1.1	/W

Silicon NPN Power Transistors

2N5881 2N5882

CHARACTERISTICS

T_j=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT	
V _{CEO(sus)}	Collector-emitter sustaining voltage	2N5881	I _C =0.2A ; I _B =0	60			V
		2N5882		80			
V _{CEsat-1}	Collector-emitter saturation voltage	I _C =7A; I _B =0.7A			1.0	V	
V _{CEsat-2}	Collector-emitter saturation voltage	I _C =15A; I _B =3.75A			4.0	V	
V _{BEsat}	Collector-emitter saturation voltage	I _C =15A; I _B =3.75A			2.5	V	
V _{BE}	Collector-emitter on voltage	I _C =6A ; V _{CE} =4V			1.5	V	
I _{CBO}	Collector cut-off current	V _{CB} =ratedV _{CBO} ; I _B =0			0.5	mA	
I _{CEO}	Collector cut-off current	2N5881			1.0	mA	
		2N5882					V _{CE} =40V; I _B =0
I _{CEx}	Collector cut-off current	V _{CE} =ratedV _{CE} ; V _{BE} =1.5V T _C =150			0.5 5.0	mA	
I _{EBO}	Emitter cut-off current	V _{EB} =5V; I _C =0			1.0	mA	
h _{FE-1}	DC current gain	I _C =2A ; V _{CE} =4V	35				
h _{FE-2}	DC current gain	I _C =6A ; V _{CE} =4V	20		100		
h _{FE-3}	DC current gain	I _C =15A ; V _{CE} =4V	4				
f _T	Transistion frequency	I _C =1A ; V _{CE} =10V	4			MHz	

Silicon NPN Power Transistors

2N5881 2N5882

PACKAGE OUTLINE

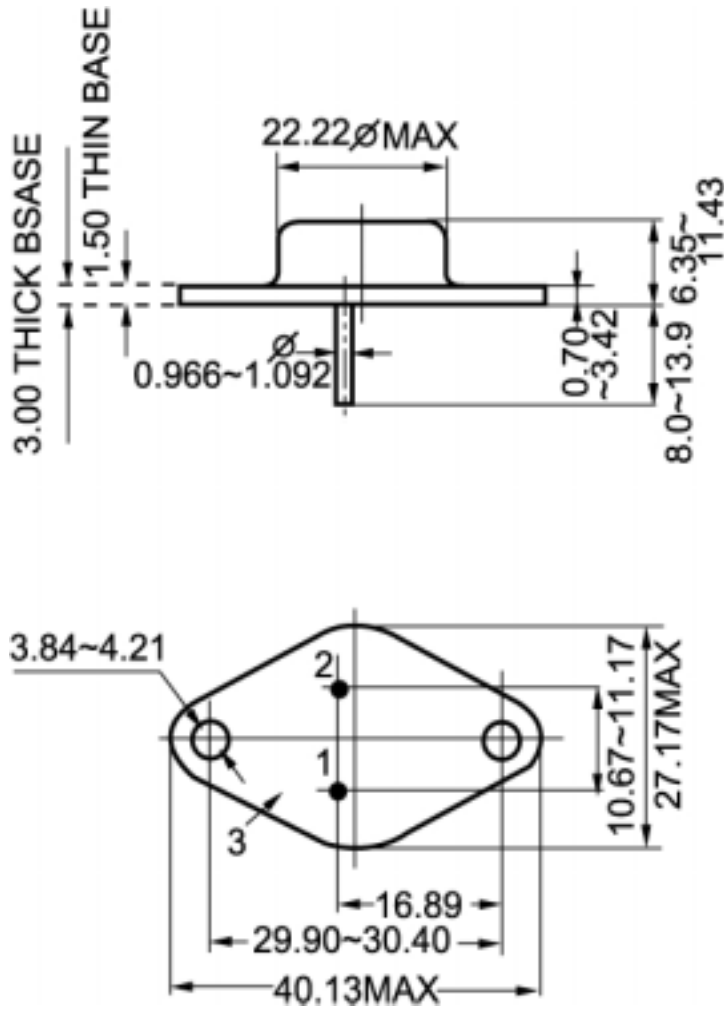


Fig.2 outline dimensions (unindicated tolerance: $\pm 0.10\text{mm}$)